

Warranty

All retail parts carry a 90-day warranty from the date of purchase. This warranty covers defects in materials or workmanship, and does not include (i) normal wear and tear, environmental conditions, improper installation; (ii) road hazards, misuse, abuse, neglect, accidents, collision, fire, theft, freezing, vandalism, riot, explosion, or objects striking the vehicle; (iii) misusing the vehicle, such as driving over curbs, overloading, racing, or using the vehicle as a stationary power source; (iv) altering, disassembling or modifying the parts; (v) defects caused or induced by failures, breakdowns, or damage by other parts, components or the vehicle; (vi) subjecting the parts to excessive moisture or water or any motor vehicle fluids (e.g.: oil, anti-freeze, battery acid, brake fluid, etc.); (vii) acts of God, natural disasters and other similar causes beyond the reasonable control of MRT; or (viii) application of chemicals that affect the parts. This Limited Warranty does not cover surface deterioration of paint, trim, and appearance items that result from use and/or exposure to the elements, such as stone chips, scratches, bird droppings, lightning, hail, windstorm, dings, dents, earthquake, road salt, tree sap, water or flood.

MRT SHALL NOT BE LIABLE TO REIMBURSE CUSTOMER/DEALER FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES RESULTING FROM THE INSTALLATION OR USE OF ANY PRODUCT SOLD THROUGH THIS CATALOG OR ARISING OUT OF ANY BREACH OF WARRANTY, EXCEPT AS MAY BE STATED IN THIS CATALOG, MRT-VISUS DISCLAIMS ALL EXPRESS AND IMPLIED WARRANTIES, INCLUDING THE WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. IN NO EVENT SHALL MRT-VISUS'S LIABILITY EXCEED THE PRICE PAID BY CUSTOMER/DEALER FOR PRODUCTS SOLD REGARDLESS IF MRT HAS BEEN ADVISED IN ADVANCE OF ANY POTENTIAL PROBLEM OR IF A CLAIM IS BASED ON CONTRACT, TORT, STRICT LIABILITY. PRODUCT LIABILITY OR OTHERWISE. SOME STATES DONOTALLOW THE EXCLUSION OR LIMITATION OF IMPLIED WARRANTIES OR THEIR DURATION, OR LIABILITY FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE EXCLUSIONS OR LIMITATIONS MAY NOT APPLY.



Tools & Materials Required

1. Phillips Screwdriver
2. Pen
3. Masking Tape
4. Scissors
5. 11/32 Wrench
6. Tape Measure





Louver Installation

Notes: . If the window is not cleaned thoroughly, the adhesive will not adhere properly. Do not install in direct sunlight; ideal temperature is approx. 70 degrees Fahrenheit. Ideally, leave louvers RESTING ON PROP RODS for one day after mounting pads. This gives the adhesive time to cure properly.



1. Read ALL Instructions before beginning installation...following the instructions as described will ensure an easier installation.
2. Clean Window with Isopropyl Alcohol thoroughly.
3. Cut Out Template where directed. Place in each corner and tape it on upper part of glass.
4. Check: Before mounting pads onto glass, tape place masking tape on hinge pads and locate in place for fitment location check. Position louver onto hinge pads and make sure the hinges on louver line up with hinge pads studs. If okay, proceed onto next step.
5. Apply Adhesion Promoter in upper pad areas.
6. Peel the tape backing from the hinge pads and mount in place. *Note: the studs should be closest to the top edge of hinge pad.*
7. Burnish with the back end of a screw driver
8. Attach the louver and hinges to the hinge pads. Put washer plates over hinges and apply the nuts loosely then align the louvers to the top of the glass.
9. Tighten the hinge nuts with 11/32" wrench.
10. Secure the latch pads on the lower latch clips and lower the louver. Use masking tape to frame the area and then apply promoter to the area.
11. Peel tape back from latch pad, slowly pressing both pads to the glass.
12. Burnish pads with back end of screwdriver.
13. Lift louver up from latch pads and let rest on prop rods for 24 hours to allow for adhesive to dry completely.

Before Installing Louver

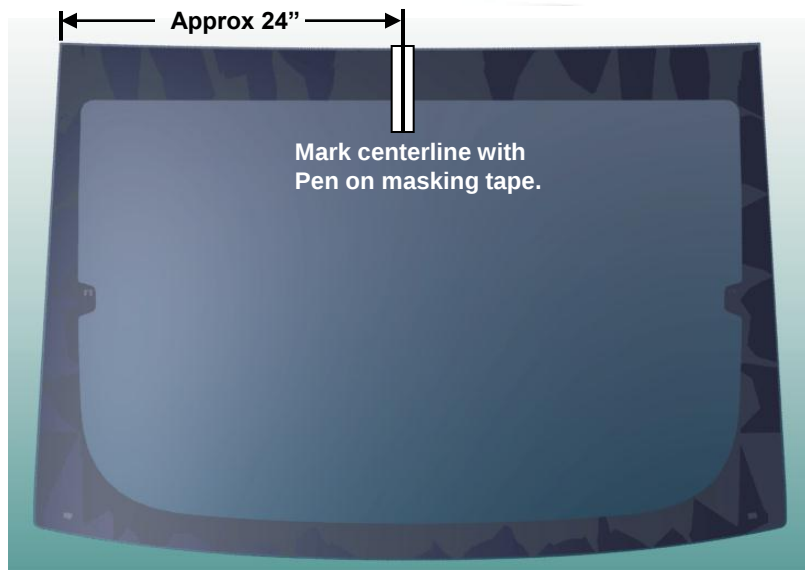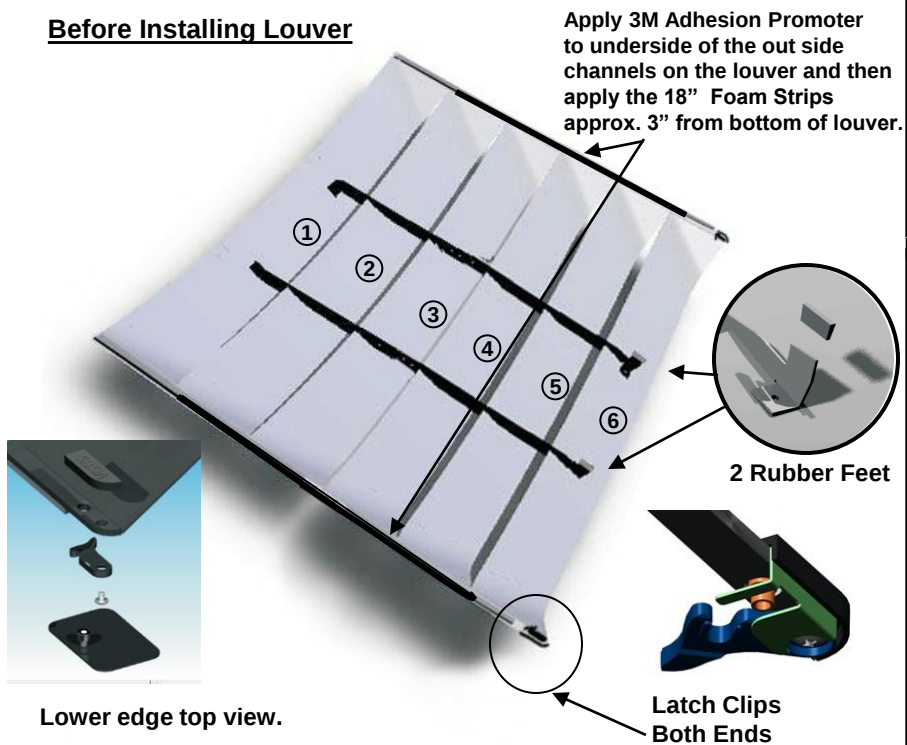

Placement of template on corner edges of glass for hinge plates location.

Studs on hinge pads with less space towards top of glass

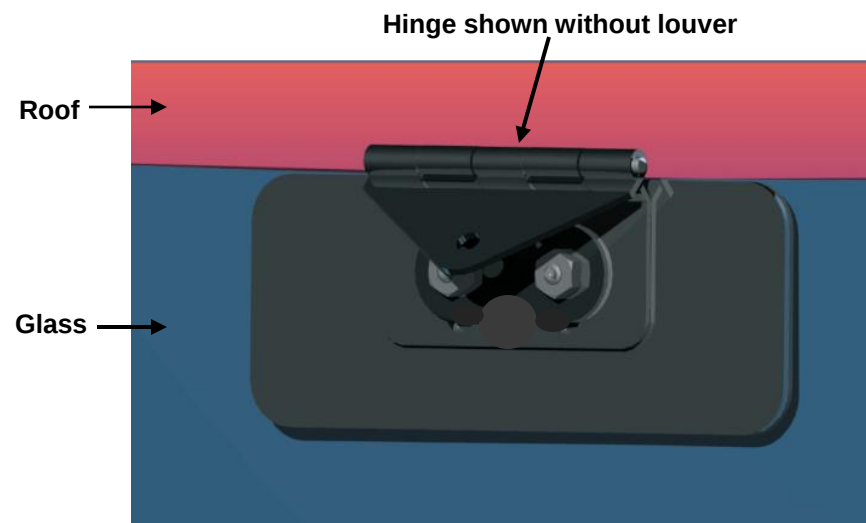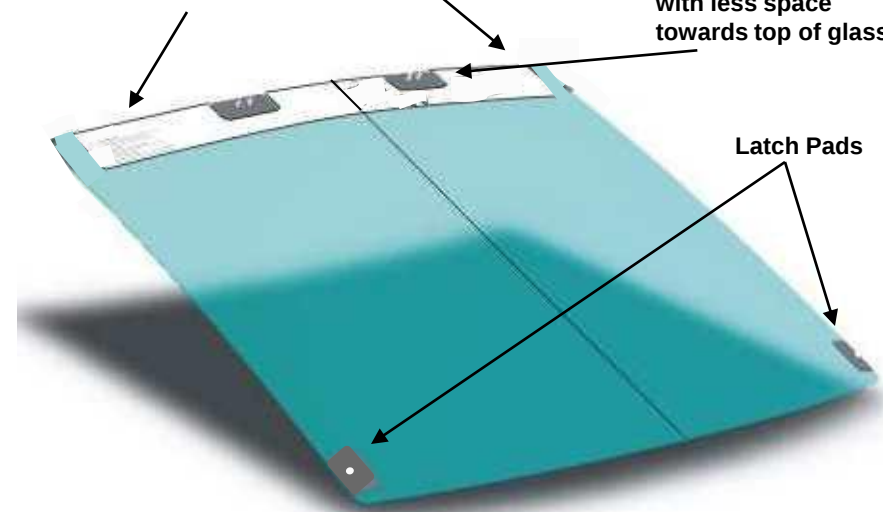

With louver raised up mount louver with hinge spacing shown above.