



FIND **NEW** ROADS™



# 2014 CHEVROLET CAMARO NEW MODEL UPDATES

For the 2014 model year, Camaro takes things to the next level in the key areas that have always made it unique – design and performance. Functionality and technology have also been enhanced to help this icon remain a sales leader in its segment.



2014 Camaro SS with available RS Exterior Appearance Package and optional 20-inch polished wheels shown.





Preproduction model shown.  
Actual production model may vary.



## Z/28 MODEL

The Z/28 (RP0 Z28) model returns for the 2014 model year (arriving in Spring 2014). This historic nameplate harkens back to its first generation roots with a track-focused design and equipment engineered for competitive driving. Feature highlights include:

- (LS7) hand-assembled naturally aspirated small block 7.0L V8 engine (GM-estimated 500+ horsepower and 500+ lb.-ft. of torque)
- 305/30ZR19 Pirelli PZero Trofeo R summer-only tires<sup>1</sup>
- 19-inch x 11-inch front and 19-inch x 11.5-inch rear forged aluminum wheels
- Recaro® performance seats (driver and front passenger)
- Red Hot, Black, Summit White, Silver Ice and Ashen Gray exterior colors


<sup>1</sup> Do not use summer-only tires in winter conditions, as it would adversely affect vehicle safety, performance and durability. Use only GM-approved tire and wheel combinations. Unapproved combinations may change the vehicle's performance characteristics. For important tire and wheel information, go to [gmaccessorieszone.com](http://gmaccessorieszone.com) or see your dealer.

GM Confidential. For GM salesperson use only. Not intended to be used for advertising purposes.





2014 Camaro SS with available RS Exterior Appearance Package and optional 20-inch polished wheels shown.

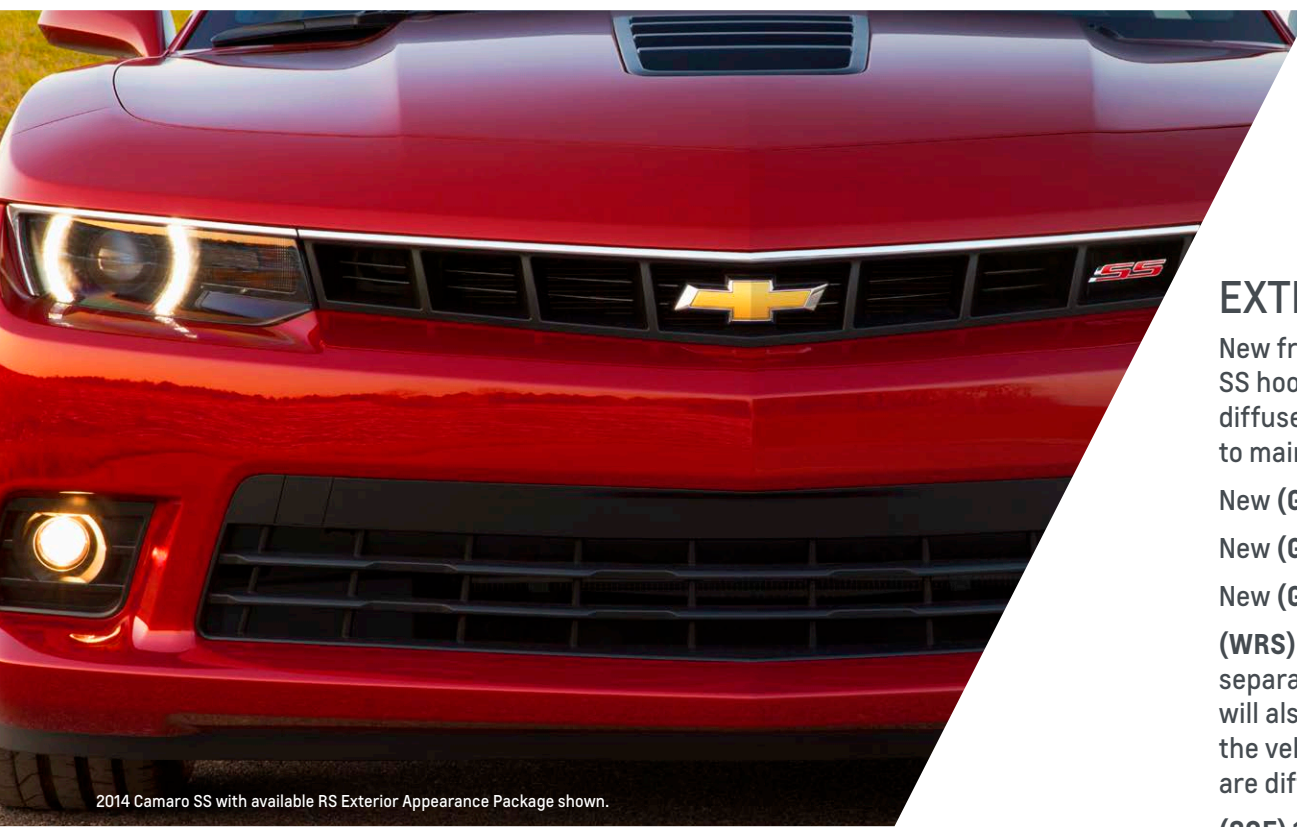

2014 Camaro SS with available RS Exterior Appearance Package shown.

## EXTERIOR UPDATES

New front and rear fascias, new headlamps and taillamps, unique SS hood, unique RS front grille, new decklid and spoiler, new rear diffusers and exhaust tips (front appearance on ZL1 is carryover to maintain specific downforce and cooling needs)

New (G7C) **Red Hot** exterior color

New (G7D) **Bright Yellow** exterior color

New (G7P) **Red Rock Metallic** exterior color

**(WRS) Available RS Exterior Appearance Package** now includes separate fog lamps and Daytime Running Lamps. The package will also offer a unique appearance up front and in the rear of the vehicle – the front grille, headlamps and taillamps (LED) are differentiated

**(SGE) 18-Inch Silver Painted Aluminum Wheels** standard on LS



Z/28 model shown. Preproduction model shown. Actual production model may vary.

## INTERIOR UPDATES

New (AYZ) Recaro® Performance Front Bucket Seats  
(available on SS and ZL1 coupe models only)

New (UV6) Color Head-Up Display (standard on 2LT, 2SS and ZL1)

New (UDD) Color Driver Information Center  
(standard on 2LT, 2SS and ZL1)

New (BRD) Available Blue Interior Accent Trim Package



## 2014 CAMARO KEY DATES (LS, LT, SS AND ZL1)

APRIL 15, 2013	ORDER GUIDE AVAILABLE
APRIL 17, 2013	TRAINING WEBCAST
MAY 2013	BUILDOUT CONSENSUS OF 2013MY
JUNE 2013	1ST CONSENSUS & DOSP CYCLES PRICE ANNOUNCED
SUMMER 2013	START OF PRODUCTION

Z/28 information will be supplied at a later date.



2014 Camaro SS with available RS Exterior Appearance Package shown.

## CHANGES FROM 2013MY TO 2014MY

### MODELS AND PACKAGES

- **(HWS) Hot Wheels® Special Edition**, including **(GHF) Kinetic Blue Metallic** exterior color no longer available
- **(BRH) Mojave Interior Accent Trim Package** no longer available
- **(VTD) Argent Ground Effects Package** no longer available
- **(DSH/DSJ/DSK) Hockey Stripe Packages** no longer available
- **(DSC/DSF/DSD) Hood and Hockey Stripe Packages** no longer available
- **(WRS) RS Exterior Appearance Package** now includes separate fog lamps and Daytime Running Lamps

### EXTERIOR

- **(GCN) Victory Red** exterior color no longer available
- **(GCO) Rally Yellow** exterior color no longer available
- **(GCR) Inferno Orange Metallic** exterior color no longer available
- **(VRV) Quarter Flares** no longer available
- **(SER) 21-Inch 5-Spoke Wheels** no longer available
- **(5W5) 21-Inch Aluminum Wheels with Silver Accents** no longer available
- Rear spoiler no longer standard on ALL models – standard on SS coupe and included with **(WRS) RS Exterior Appearance Package** on LT coupe models; standard on all convertible models with integral antenna
- **(SGE) 18-Inch painted aluminum wheels** now standard on LS
- **(VAS) Body-color grille** now available in all 9 exterior colors
- **(SB3) Body-color rear spoiler** now available in all 9 exterior colors

PERFORMANCE	CAMARO Z/28	CAMARO ZL1	CAMARO SS WITH 1LE PERFORMANCE PACKAGE	CAMARO SS	CAMARO V6
ENGINE	7.0L LS7 small block V8	6.2L LSA supercharged V8, aluminum block and heads	6.2L LS3 V8, aluminum block and heads	6.2L LS3 V8, aluminum block and heads (manual) 6.2L L99 V8, aluminum block and heads (automatic)	3.6L SIDI DOHC V6 VVT
BORE AND STROKE	4.13 x 4.00	4.06 x 3.62	4.06 x 3.62	4.06 x 3.62	—
COMPRESSION RATIO	11.0:1	9.1:1	10.7:1	10.7:1 (manual); 10.4:1 (automatic)	—
HORSEPOWER	500+ <sup>1</sup>	580 @ 6000 rpm	426 @ 5900 rpm	426 @ 5900 rpm (manual) 400 @ 5900 rpm (automatic)	323 @ 6800 rpm
TORQUE	500+ lb.-ft. <sup>1</sup>	556 lb.-ft. @ 4200 rpm	420 lb.-ft. @ 4600 rpm	420 lb.-ft. @ 4600 rpm (manual) 410 lb.-ft. @ 4300 rpm (automatic)	278 lb.-ft. @ 4800 rpm
REDLINE	7000 rpm	6200 rpm	—	6600 rpm (manual) 6200 rpm (automatic)	—
AXLE RATIO	to come	3.73:1 (manual); 3.23:1 (automatic)	3.91:1	3.45:1 (manual); 3.27:1 (automatic)	3.27:1 (1LS, LT); 2.92:1 (2LS)
0 TO 60	to come	4.0 seconds (manual Coupe) 3.9 seconds (automatic Coupe) 4.2 seconds (manual Convertible) 4.1 seconds (automatic Convertible)	4.7 seconds	4.7 seconds (manual Coupe) 4.8 seconds (automatic Coupe)	6.4 seconds (2LS) 5.9 seconds (1LS and LT Coupe)
QUARTER MILE	to come	12.1 seconds @ 120 mph (manual Coupe) 12.0 seconds @ 119 mph (automatic Coupe) 12.4 seconds @ 117 mph (manual Convertible) 12.3 seconds @ 117 mph (automatic Convertible)	12.9 seconds @ 113 mph	12.9 seconds @ 113 mph (manual Coupe) 13.3 seconds @ 105 mph (automatic Coupe)	14.8 seconds @ 93 mph (2LS) 14.3 seconds @ 98 mph (1LS, manual LT Coupe) 14.4 seconds @ 98 mph (automatic LT Coupe)
SKID PAD (MAXIMUM LATERAL ACCELERATION )	1.05 g	1.0 g (Coupe) .98 g (Convertible)	1.0 g	.90 g	.80 g (LS); .82 g (LT) .90 g (LT with RS Package)
TOP SPEED	to come	180 mph (manual Coupe) 184 mph (automatic Coupe) 155 mph (manual Convertible) 155 mph (automatic Convertible)	155 mph	155 mph	155 mph (113 mph LS, 1LT with 18" wheels)
NÜRBURGRING LAP TIME	to come	7:41.27 (Coupe)	—	8:19 (Coupe)	—
BRAKING SYSTEM	Brembo® carbon-ceramic rotors	Front 2-piece 14.6" rotors with Brembo® 6-piston calipers and rear 1-piece 14.4" rotors with Brembo 4-piston calipers; 4-wheel ABS	Front 1-piece 14" rotors with red-painted Brembo 4-piston calipers and rear 1-piece 14.4" rotors with red-painted Brembo 4-piston calipers; 4-wheel ABS	Front 1-piece 14" rotors with Brembo 4-piston calipers and rear 1-piece 14.4" rotors with Brembo 4-piston calipers; 4-wheel ABS	4-wheel disc with 4-wheel ABS
BRAKING DISTANCE	Capable of 1.5 g in deceleration	60 to 0 in 126 ft.	60 to 0 in 120 ft.	60 to 0 in 123 ft.	60 to 0 in 123 ft. (LT with RS Package and 20" wheels) 60 to 0 in 128 ft. (LT with 19" wheels) 60 to 0 in 132 ft. (LS, 1LT with 18" wheels)
CURB WEIGHT	300 lbs. less than ZL1	4,120 lbs. (Coupe) 4,380 lbs. (Convertible)	3,875 lbs.	3,849 lbs. (manual Coupe) 3,902 lbs. (automatic Coupe)	3,712 lbs. (2LS and automatic LT Coupe) 3,728 lbs. (1LS and manual LT Coupe)
POWER-TO-WEIGHT	to come	7.1:1 (curb weight/horsepower) (Coupe) 7.55:1 (curb weight/horsepower) (Convertible)	9.1:1 (curb weight/horsepower)	9.04 (curb weight/horsepower) (manual Coupe)	—
WHEELS	19" x 11" forged aluminum front 19" x 11.5" forged aluminum rear	20" x 10" forged aluminum front 20" x 11" forged aluminum rear	20" x 10" forged aluminum front 20" x 11" forged aluminum rear	20" x 8" aluminum front 20" x 9" aluminum rear	20"x 8" aluminum front 20"x 9" aluminum rear (LT with RS Package)
TIRES	Pirelli PZero™ Trofeo R (305/30ZR19) <sup>2</sup> summer-only	Goodyear® Eagle® F1 Supercar GEN2 (P285/35ZR20 front; P305/35ZR20 rear) <sup>2</sup> summer-only	Goodyear Eagle F1 Supercar GEN2 (P285/35ZR20) <sup>2</sup> summer-only	Pirelli® PZero® (245/45R20 front; 275/40R20 rear) <sup>2</sup> summer-only	BF Goodrich Radial T/A (P245/55R18) (LS, 1LT) Pirelli PZero Nero (P245/50R19) <sup>2</sup> (1LT with available 19" wheels, 2LT) summer-only Pirelli PZero (P245/45R20) <sup>2</sup> front and (P275/40R20) <sup>2</sup> rear (LT with RS Package) summer-only
WEIGHT DISTRIBUTION (F/R)	to come	52.4/47.6 (Coupe) 51.6/48.4 (Convertible)	51.8/48.2	51.8/48.2 (manual Coupe) 52.2/47.8 (automatic Coupe)	51.8/48.2 (manual Coupe) 52.2/47.8 (automatic Coupe)
STABILIZER BARS (DIAMETER IN MILLIMETERS)	to come	Front = 25.0mm, Rear = 28.0mm (Coupe) Front = 23.0mm, Rear = 26.0mm (Convertible)	Front = 27.0mm Rear = 28.0mm	Front = 23.0mm Rear = 24.0mm (Coupe)	—

<sup>1</sup> GM estimated. <sup>2</sup> Do not use summer-only tires in winter conditions, as it would adversely affect vehicle safety, performance and durability. Use only GM-approved tire and wheel combinations. Unapproved combinations may change the vehicle's performance characteristics. For important tire and wheel information, go to [gmaccessorieszone.com](http://gmaccessorieszone.com) or see your dealer.